

ECT 4x18PT



Specificatii

| | |
|--|----------------------|
| Cod ETI | 001100270 |
| Descriere | ECT 4x18PT |
| Denumire clasă | Cutie distribuție |
| Curent nominal (A) | 63 |
| Tensiunea nominală(V) | 400 |
| Tip montaj | Suprafață montată |
| Grad de protecție IP | IP 40 |
| Numarul de module (total / pe rand) | 72 / 18 |
| Dimensiune (numarul de randuri) | 4 |
| Usa (material, culoare) | Plastic, transparent |
| Parte inferioara cutie (material, culoare) | Plastic, alb |
| Numarul de terminale PE/N (conexiuni) | 30 / 30 |
| Test pentru fire | 650 |

[Pagina de produse online](#) 

Alta documentatie



[Catalog caracteristici tehnice](#)

[Model 3D](#)

[Manual de instructiuni](#)

[Declaratie CE](#)

Desen cotat

Technical data

| | |
|--------------------------|--------------------------------------|
| Degree of protection | IP 40* |
| Colour | white |
| Double Insulation | |
| Standard | IEC 62208, IEC 60670-1, IEC 60670-24 |
| Installation temperature | -25° / +60°C |
| Glow wire test | 650°C |

*IP 30 for EC 1+1, 3+1, 3+2, ECGcaMEDIA

Number of N - PE terminals:

| | | |
|-----------------|------|--------------|
| ECT/ECM4PT/PO | 2x4 | 4 PE / 4 N |
| ECT/M8PT/PO | 2x8 | 8 PE / 8 N |
| ECT/M12PT/PO | 2x10 | 10 PE / 10 N |
| ECT/M18PT/PO | 2x13 | 13 PE / 13 N |
| ECT/M24PT/PO | 2x13 | 13 PE / 13 N |
| ECT/M36PT/PO | 2x15 | 15 PE / 15 N |
| ECT48PT/PO | 2x20 | 20 PE / 20 N |
| ECT/M 2x18PT/PO | 2x15 | 15 PE / 15 N |
| ECT/M 3x18PT/PO | 2x25 | 25 PE / 25 N |
| ECT 4x18PT/PO | 2x30 | 30 PE / 30 N |
| ECG14 | 2x10 | 10 PE / 10 N |
| ECG28 | 2x13 | 13 PE / 13 N |
| ECG42 | 2x15 | 15 PE / 15 N |
| ECG56 | 2x20 | 20 PE / 20 N |
| ECG70 | 2x30 | 30 PE / 30 N |
| EC 1+1 | - | |
| EC 3+1 | - | |
| EC 3+2 | 2x4 | 4 PE / 4 N |

- ECG14, ECG28, ECG42 have 1 additional free space to build in an extra PST-UNI terminal.


- ECG56 has 3 additional free spaces to build in up to 3 extra PST-UNI terminals.

- Double Insulation not valid for ECG MEDIA

Surface mounted distribution board

| type | Dimensions | | | | | Max. allowed power losses when Max. number of devices are installed Pde |
|---------------------|------------|--------|--------|--------|--------|--|
| | A | B | C | D | E | |
| ECT4PT/ECT4PO | 235 mm | 143 mm | 98 mm | 127 mm | 46 mm | 10W |
| ECT8PT/ECT8PO | 236 mm | 287 mm | 112 mm | 107 mm | 180 mm | 16W |
| ECT12PT/ECT12PO | 236 mm | 287 mm | 112 mm | 107 mm | 180 mm | 30W |
| ECT18PT/ECT18PT | 361 mm | 287 mm | 112 mm | 232 mm | 180 mm | 30W |
| ECT24PT/ECT24PO | 485 mm | 287 mm | 112 mm | 357 mm | 180 mm | 30W |
| ECT36PT/ECT36PO | 652 mm | 287 mm | 112 mm | 482 mm | 180 mm | 35W |
| ECT48PT/ECT48PO | 236 mm | 396 mm | 112 mm | 107 mm | 289 mm | 25W |
| ECT2x18PT/ECT2x18PO | 361 mm | 396 mm | 112 mm | 232 mm | 289 mm | 30W |
| ECT3x18PT/ECT3x18PO | 526 mm | 396 mm | 112 mm | 357 mm | 289 mm | 35W |
| ECT3x18PT/ECT3x18PO | 651 mm | 396 mm | 112 mm | 482 mm | 289 mm | 40W |

*Sizes are also valid for IT distribution boards DIDO-E MEDIA: ECT...MEDIA

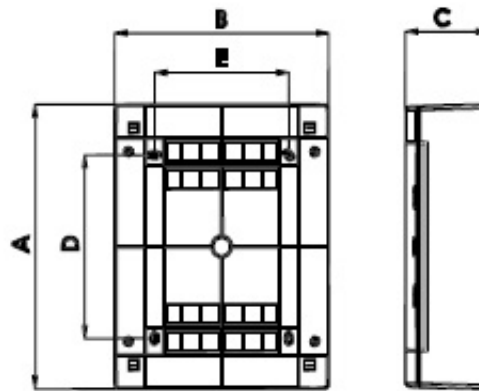

Flush mounted distribution board

| type | Dimensions | | | | | | | Max. allowed power losses when Max. number of devices are installed Pde |
|---------------------|------------|--------|--------|--------|--------|--------|-------|--|
| | A | B | C | D | E | F | G | |
| ECM4PT/ECM4PO | 232 mm | 139 mm | 99 mm | - | 123 mm | 216 mm | 69 mm | 10W |
| ECM8PT/ECM8PO | 232 mm | 211 mm | 99 mm | - | 201 mm | 212 mm | 68 mm | 16W |
| ECM12PT/ECM12PO | 232 mm | 283 mm | 106 mm | - | 273 mm | 212 mm | 68 mm | 25W |
| ECM18PT/ECM18PO | 357 mm | 283 mm | 106 mm | 125 mm | 273 mm | 336 mm | 68 mm | 30W |
| ECM24PT/ECM24PO | 482 mm | 283 mm | 106 mm | 125 mm | 273 mm | 462 mm | 68 mm | 30W |
| ECM36PT/ECM36PO | 232 mm | 392 mm | 106 mm | - | 382 mm | 212 mm | 68 mm | 25W |
| ECM2x18PT/ECM2x18PO | 357 mm | 392 mm | 106 mm | 125 mm | 382 mm | 336 mm | 68 mm | 30W |
| ECM3x18PT/ECM3x18PO | 522 mm | 392 mm | 106 mm | 125 mm | 382 mm | 502 mm | 68 mm | 35W |

