*ETITEC V T2 255/20 1+1



Specificatii

Cod ETI	002442954
Descriere	*ETITEC V T2 255/20 1+1
Denumire clasă	Protec ie supratensiuni
Tip	T2
AC max continous operating voltage Uc	255V
In (8/20)	20kA
Parte superioara - Nivel de protectie a tensiunii (kV)	1.5kV
Curent de scurgere	DA
Tehnologie aplicata	MOV
Semnalare la distan ă	NU
Sistem re ea	TT/TN-S
Numarul de module	2
Adancime incorporata (mm)	68mm
Func ie	SPD
Grup Catalog	ETITEC V

Pagina de produse online


Alta documentatie

Catalog caracteristici tehnice
Model 3D
2D mușchi
Manual de instructiuni
Declaratie CE
Eplan mușchi

ETIM clasificare internationala

Clasificare	EC000941
Denumire clasă	Surge protection device for power supply systems
System configuration DC	Nu
System configuration IT	Nu
System configuration TN-C	Nu
System configuration TN-S	Da
System configuration TT	Da
System configuration other	Nu
Nominal discharge surge current (8/20)	20kA
Nominal voltage AC	230V
Short-circuit breaking capacity (Isccr)	25kA
Max. continuous voltage AC	255V
Max. discharge surge current (8/20)	40kA
Mounting method	DIN rail (top hat rail) 35 mm
Max. conductor cross section solid (solid, stranded)	35mm²
Max. conductor cross section flexible (fine-strand)	25mm²
With remote signalling contact	Nu
Integrated backup fuse	Nu
Signalling at the device	Optical
Category type 2	Da
Degree of protection (IP)	IP20

Desen cotat

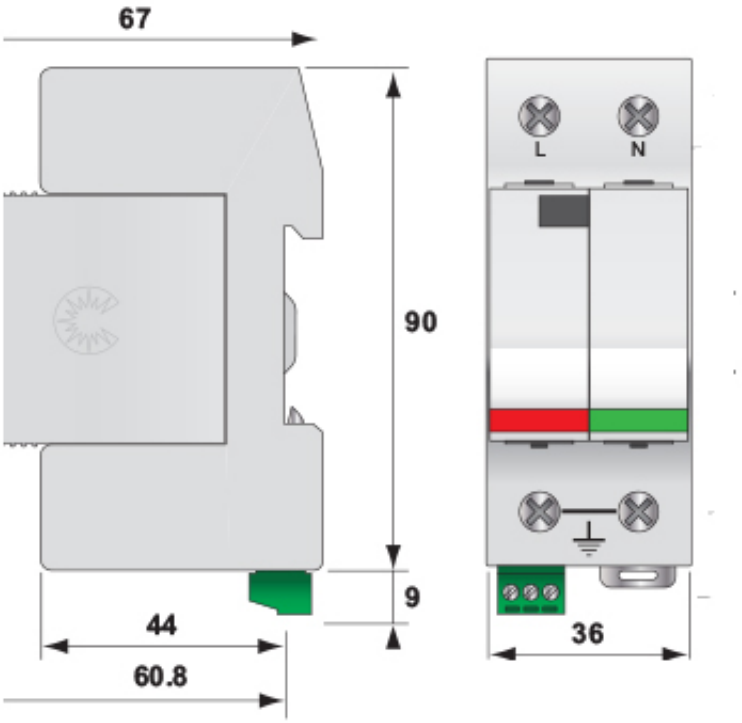

Simbol/Conexiune

