ETITEC V T12 280/12,5 3+1 RC

Protecție supratensiuni



Cod ETI:	**002442918**
Funcție:	**SPD**
Tip:	**T1, T2**
Tensiune maximă de funcționare continuă în AC Uc:	**280 V**
I imp(10/350) Curent de Impuls:	**12,5 kA**
In (8/20) :	**20 kA**
Imax(8/20):	**50 kA**
Tip curent:	**AC**
Tensiune nominală AC:	**230 V**
Parte superioara - Nivel de protectie a tensiunii:	**1,3 kV**
Semnalare la distanță :	✓
Curent de scurgere :	✓
Sistem rețea:	**TT/TN-S**
Numarul de module :	**4**
Instalare:	**Home and residental building protection**
Adancime incorporata:	**82 mm**
Grad de protecție IP:	**IP20**
Tehnologie aplicata :	**MOV**
Grup Catalog:	**ETITEC V**

Pagina online a produsului

Documente

CATALOG DATE TEHNICE

MANUAL DE INSTRUCȚIUNI

DECLARAȚIE CE

FIȘIER 2D

FIȘIER 3D

FIȘIER EPLAN

ETIM

Remote signalling	✓
Nominal voltage AC	**230 V**
Test class	**Type 1 + 2**
Degree of protection (IP)	**IP20**
Mounting method	**DIN rail (top hat rail) 35 mm**
Lightning impulse current (10/350 µs)	**12,5 kA**
Specific energy (W/R)	**40 kJ/Ohm**
System configuration TN-S	✓
Voltage protection level	**1,3 kV**
Number of poles	**4**
System configuration TT	✓
Signalling at the device	**Optical**
Max. continuous voltage AC	**280 V**

Logistică

Produs

Greutate	**0,492 kg**
Net width	**72 mm**
Net height	**99 mm**
Net depth	**80,9 mm**
Stock unit of measure	**pcs**

Ambalare de bază


Basic packaging quantity	**1 pcs**
EAN code for a basic packaging	**3838895828259**
Basic packaging weight	**0,514 kg**
Basic Packaging Dimensions Height	**83 mm**
Basic Packaging Dimensions Width	**75 mm**
Basic Packaging Dimensions Depth	**100 mm**
Basic packaging volume	**0,622 dm³**

Ambalare transport

Intermediate packaging quantity	**2 pcs**
EAN code for a intermediate packaging	**3838895857877**
Intermediate packaging weight	**1,151 kg**
Intermediate Packaging Dimensions Height	**90 mm**
Intermediate Packaging Dimensions Width	**105 mm**
Intermediate Packaging Dimensions Depth	**183 mm**
Transport packaging quantity	**16 pcs**
EAN code for a transport packaging	**3838895828266**
Transport packaging weight	**9,84 kg**
Transport Packaging Dimensions Height	**290 mm**
Transport Packaging Dimensions Width	**210 mm**
Transport Packaging Dimensions Depth	**460 mm**
Transport packaging volume	**28,014 dm³**
Pallet quantity	**256 pcs**
Customs tariff	**85354000**

Symbol connection

V: High energy MOV
GSG: Specific gas tube
Mi: Disconnection indicator
Ft: Thermal fuse
t°: Thermal disconnection mechanism
C: Contact for remote signal

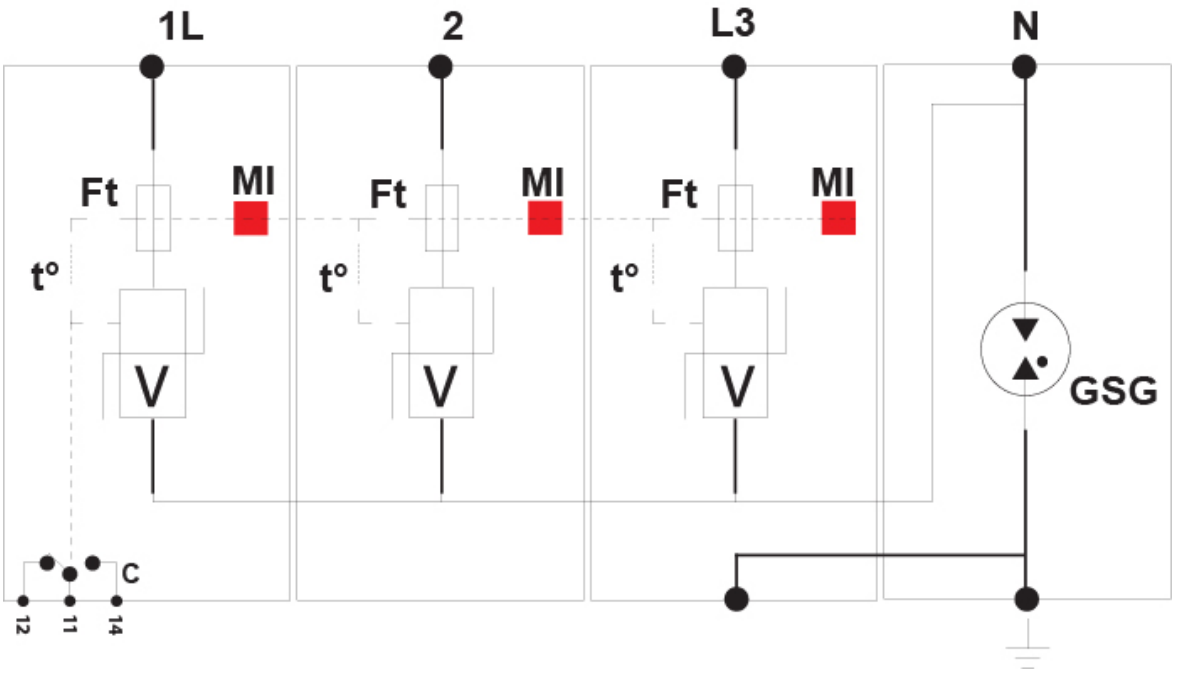

Dimension

